

Product Overview

All these applications
in one small unit

- Indoor air quality monitoring
- Walk-through surveys
- Personal exposure monitoring
- Time & motion studies
- Workplace & plant monitoring
- Fixed-point continuous monitoring
- Remediation personal surveillance
- Remote alarming
- Mobile monitoring in vehicles & aircraft
- Toxicology & epidemiology studies
- Emergency response
- Testing air filtration efficiency



personalDataRAM™ Series

Measures airborne particulate concentration in real time

- pDR-1000AN
For passive air sampling applications
- pDR-1200
For active air sampling applications

pDR-1000AN Hand-held and fixed-point, real-time aerosol monitor/datalogger

Measure airborne particulate concentration in real-time

The *personal*DataRAM (pDR-1000AN) measures mass concentrations of dust, smoke, mists, and fumes in real time, and sounds an audible alarm whenever the user-defined level is exceeded. Conventional filter-based monitoring methods cannot indicate dangerous, real-time dust levels. In contrast, the pDR-1000AN alerts you to a problem within seconds, allowing you to take immediate action. With the datalogging enabled, the instrument automatically tags and time stamps the data collected, and stores it for subsequent retrieval, printing, or graphing through a computer.

Highest performance of any real-time personal particulate monitor

With a measurement range from 0.001 to 400 mg/m³ (auto-ranging), and an optical feedback stabilized sensing system, the pDR-1000AN sets the standard for sensitivity, long-term stability and reliability.

The palm-sized pDR-1000AN weighs only 18 oz (0.5 kg) for easy portability and attachment to a belt or a shoulder strap. The absence of any moving parts, such as pumps, motors and valves, and the use of low-power semiconductors housed in a ruggedized case ensures long life and dependable operation.

High correlation with gravimetric measurement

The pDR-1000AN is a light-scattering photometer (i.e., nephelometer) incorporating a pulsed, high output, near-infrared light emitting diode source, a silicon detector/hybrid preamplifier, and collimating optics and a source reference feedback PIN silicon detector. The intensity of the light scattered over the forward angle of 50° to 90° by airborne particles passing through the sensing chamber is linearly proportional to their concentration. This optical configuration produces optimal response to particles in the size range of 0.1-10 µm, achieving high correlation with standard gravimetric measurements of the respirable and thoracic fractions.

Simple zeroing and calibration

The pDR-1000AN arrives practically ready to use after the easy zeroing step. The unit comes gravimetrically calibrated in mg/m³ (NIST traceable) using standard SAE Fine test dust (ISO Fine). Zeroing with particle-free air is accomplished quickly and effectively under field conditions using the zeroing kit included with the instrument. Internal firmware controls an automatic calibration check. To maximize efficiency in the field, gravimetric calibration can be performed by comparison with a filter sampler and programming of the calibration constant.

Standard Accessories

- Universal voltage power supply
- PC communications software
- Zeroing kit
- Belt clip kit
- Instruction manual
- Carrying case
- Signal output cables

Optional Accessories

- Rechargeable battery pack (NiMH)
- Active sampling kit (converts pDR-1000AN to pDR-1200)
- Portable pump unit
- Shoulder strap
- Remote alarm interface
- Wall mounting bracket



pDR-1200 Active aerosol monitor/datalogger, plus aerodynamic sizing

Designed for active particulate monitoring applications

The *personaDataRAM*[™] (model pDR-1200) performs active sampling applications and aerosol sizing. The pDR-1200 requires a vacuum pump module to perform particle size selective measurements under field conditions. The separate pump (not included) is required for active sampling and aerosol sizing. With optional inlet accessories, the pDR-1200 is excellent for ambient air measurements under variable wind and high humidity conditions. It is ideal for respirable, thoracic, and PM_{2.5} monitoring, as well as continuous emission and test chamber monitoring. With an isokinetic sampling set, the pDR-1200 can be used for stack and duct extractive sampling monitoring. Membrane filters can be used to capture particles for subsequent laboratory analysis.


Aerodynamic particle sizing

The pDR-1200 incorporates an optimally designed metal cyclone (BGI Model GK 2.05) or the optional low flow cyclone (BGI Model Triplex SCC1.062-CUST) especially selected for PM_{2.5} collection at 1.5 LPM.

By operating the pump at specific sampling flow rates, the pDR-1200 cyclone preseparator provides precisely defined particle size cuts.

Primary calibration and particle samples by filter collection

An integral filter holder directly downstream of the photometric sensing stage accepts 37 mm filters. The calibration constant of the pDR-1200 is simply adjusted to coincide with the filter-determined concentration. Primary gravimetric calibration of the instrument concentration readout is easily accomplished under actual field conditions by means of this integral filter. Use membrane filters for chemical analysis or concurrent gravimetric measurements.

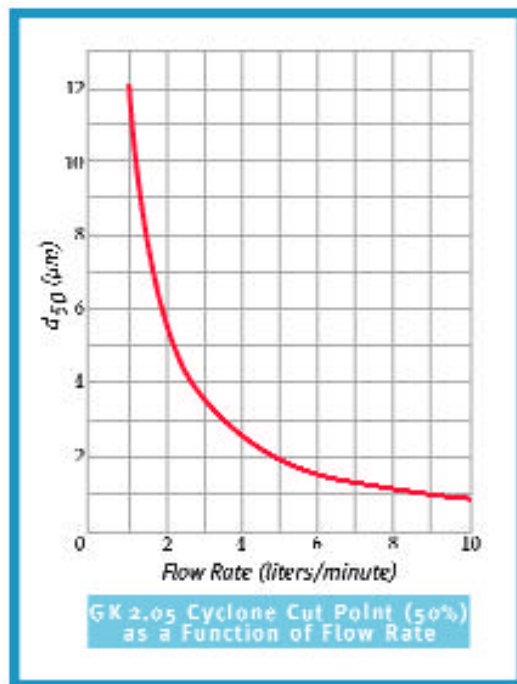

pDR-PU Attachable Pump Module

This optional accessory is designed for use with the *personaDataRAM* Model pDR-1200. It incorporates a dual-chamber diaphragm pump, a volumetric flow sensing, and control unit. The pump module operates from either an optional, rechargeable NiMH battery pack or from AC line current using the power supply/charger supplied with the *personaDataRAM*. The pDR-PU is designed as a modular unit that can be used in various combinations.

- Flow rate (user adjustable): 1 to 4 liters/minute
- Typical Conditions: 2 LPM @ 10 in H₂O (25 mbar) for up to 4 hours
- Maximum Conditions: 2 LPM @ 30 in H₂O
- Precision of constant flow rate control: ±2%
- Power: 9 VDC, 200 mA at 4 liters/minute (approximate)
- Dimensions: 4 in (100 mm) H x 3.6 in (90 mm) W x 1.8 in (45 mm) D
- Weight: 1 lb (0.45 kg)

personaDataRAM[™] Series

At last,
a compact,
versatile,
real-time
aerosol monitor

Specifications

Concentration Measurement Range (auto-ranging)

Referred to gravimetric calibration with SAE
Fine test dust ($mmd = 2$ to 3 mm $sg = 2.5$, as aerosolized)
0.001 to 400 mg/m³

Scattering Coefficient Range

1.5×10^{-6} to 0.6 m⁻¹ (approx) @
 $\lambda = 880$ nm

Precision/Repeatability Over 30 Days (2-sigma at constant temperature and full battery voltage)

- $\pm 2\%$ of reading or ± 0.005 mg/m³, whichever is larger, for 1 second averaging time
- ± 0.5 of reading or ± 0.0015 mg/m³, whichever is larger, for 10 second averaging time
- $\pm 0.2\%$ of reading or ± 0.0005 mg/m³, whichever is larger, for 60 second averaging time

Accuracy

Referred to gravimetric calibration with SAE
Fine test dust ($mmd = 2$ to 3 mm, $sg = 2.5$, as aerosolized)
 $\pm 5\%$ of reading \pm precision

Resolution

0.1% of reading or 0.001 mg/m³, whichever is larger

Particle Size Range of Maximum Response

0.1 to 10 μ m

Flow Rate Range (model pDR-1200)

1-10 liters/min (external pump required)

Aerodynamic Particle Sizing Range

1.0 to 10 μ m (pDR-1200 only)

Concentration Display Updating Interval

1 second

Concentration Display Averaging Time (user selectable)

1 to 60 seconds

Alarm Level Adjustment Range (user selectable)

Selectable over entire measurement range

Alarm Averaging Time (user selectable)

Real-time (1 to 60 seconds) or STEL (15 minutes)

Datalogging Averaging Periods (user selectable)

1 second to 4 hours

Total Number of Data Points That Can Be Logged in Memory

More than 13,300

Number of Data Tags (data sets)

99 (maximum)

Logged Data

- Each data point: average concentration, time/date, and data point number
- Run summary: overall average and maximum concentrations, time/date of maximum, total number of logged points, start time/date, total elapsed time (run duration), STEL concentration, and time/date of occurrence, averaging (logging) period, calibration factor, and tag number

Analog Signal Output

0 to 5 V and 4 to 20 mA, with selectable full scale ranges between 0.1 and 400 mg/m³

Power

- Internal battery 9 V alkaline, 20 hour run time (typical)

- Internal battery 9 V lithium, 40 hour run time (typical)
- AC source universal voltage adapter (included) 100-250 volts, 50-60 Hz (CE marked)
- Optional battery pack rechargeable NiMH, 72 hour run time typical (pDR-BP)

Readout Display

LCD 16 characters (4 mm height) x 2 lines

Serial Interface

RS232, 4800 baud

Computer Requirements

PC compatible, 486 or higher, Windows 95® or higher

Storage Environment

-20°C to 70°C (-4°F to 158°F)

Operating Environment

-10°C to 50°C (14°F to 122°F), 10 to 95% RH, non-condensing

Dimensions (max external)

153 mm (6.0 in) H x 92 mm (3.6 in) W x 63 mm (2.5 in) D (pDR-1000AN)
160 mm (6.3 in) H x 205 mm (8.1 in) W x 60 mm (2.4 in) D (pDR-1200 including cyclone and filter holder)

Weight

0.5 kg (18 oz) (pDR-1000AN)
0.68 kg (24 oz) (pDR-1200)

Approvals

- Intrinsic safety approval by US Mine Safety & Health Administration (MSHA) coal-mining environments containing methane gas (the pDR-PU pump is not approved by MSHA)
- US FCC Rules (Part 15)
- CE certified

About Thermo

Thermo Electron Corporation, the world's leading maker of high-tech instruments, provides instruments, equipment, software, and solutions that help laboratory and industrial customers advance scientific knowledge, enable drug discovery, improve manufacturing

processes, and protect people and the environment. With annual revenue exceeding \$2 billion, Thermo is a global leader employing 11,000 people in 30 countries worldwide. The company is based in Waltham, Massachusetts.

LITPERSONALDATARAMSERIES 4.03

Thermo Electron

27 Forge Parkway

Franklin MA USA 02038

www.thermo.com/ih

1.866.282.0430

+1.508.520.0430

+1.508.520.1460 fax

Analyze • Detect • Measure • Control™

Thermo
ELECTRON CORPORATION