



Catalogue 2012

DREAMTEAM PACKAGING



Queries: Deliveries / Production 087 353 4446



DREAMTEAM PACKAGING

Reg No.2001/086347/23,
VAT Reg. 4710 2108 59
Phone : 087 353 4446
Fax: 086 566 2863 / 086 682 5356
E:mail – info@dreamteampackaging.co.za

PostNet Suite 67
Private Bag x 592
Silverton
Gauteng, 0127
<http://www.dreamteampackaging.co.za>

Your one stop packaging solutions...



All exporting closed boxes must be heat treated in accordance with a specific time-temperature schedule that achieves a minimum temperature of 56°C for a minimum duration of 30 continuous minutes throughout the entire profile of the wood. Various energy sources or processes may be suitable to achieve these parameters. For example, kiln-drying, heat-enabled chemical pressure impregnation, microwave or other treatments may all be considered heat treatments provided that they meet the heat treatment parameters specified in the standard.(HT) ISPM15 STANDARDS



Pallets and Phytosanitary measures and procedures. Since pallets are mostly associated with shipments it is rather very important to be informed about the phytosanitary import regulatory system, 2004 taking into account the frequent re-use of wooden pallets.DTP recommends that all pallets be treated / fumigated with methyl bromide. Our minimum requirement is 2% chloropicrin; 4% morphology against fungi attack. Our pallets have been tested and carries weight between 600 and 900kg on four entry pallets and 700 to 1ton on single entry pallets.



All our products are made according to our customers needs within the requirements of the ISPM15 Standards. Products that are being distributed locally in South Africa are not treated and we use wet of saw timber for the manufacturing of such products.

Slatted crates are all manufactured according client specifications. We at DTP normally give advice to our clients according to packaging needs and the strength of the crates. All material and accessories used on site will be supplied as per quote. Material such as shrink wrapping, bubble wrap, masking tapes, buff tapes corded strapping with steel buckles etc. will be included on all quotations.



This is a samples of custom made closed boxes that is lined out with 5mm thick foaming sheet and has a "V" block on both sides that keeps the cylinder away from all edges. The product will then be stabilized and chocked into its position in order for the product not to move. The strapping is then done to secure that the product is strapped onto the base of the box. The lid will then be closed with a pneumatic nail gun that shoot's nails , penetrates the timber with approximately 3mm and cannot be removed or taken out without damaging the box. These boxes are made for light duty purposes. We normally use polyurethane finger joint timber (box in the middle) that were treated with temperatures of 56°C for three minutes and a dosage rate of +- 48g/m³ that = to 4% morphology against fungi attack. This box will be heavy on delivery since we prefer to do treatment before delivery. If this type of box should be used for electrical components it is recommended that clay desiccants be inserted before closing of such box.



All exporting crates must be heat treated in accordance with a specific time-temperature schedule that achieves a minimum temperature of 56°C for a minimum duration of 30 continuous minutes throughout the entire profile of the wood. Various energy sources or processes maybe suitable to achieve these parameters. For example, kiln-drying, heat-enabled chemical pressure impregnation, microwave or other treatments may all be considered heat treatments provided that they meet the heat treatment parameters specified in the standard. (HT) ISPM15 STANDARDS. All wooden products should have a specified mark that identifies the producer / manufacturer.



Masonite boxes are often used for all air freight shipments. The masonite board are being manufactured as compressed / processed sheets that can be used in almost any import and export consignment that would normally be subject to phytosanitary inspection. It could also be known as partical board, oriented strand board or veneer that has been created using glue, heat or pressure, or a combination thereof. This is suitable for air freight only. This product is made with 4mm - 16mm plywood or masonite brown / white board . All these boxes are made with solid closed bases with the export mark on all product e.g. HT, Arrows, wine glass, umbrella a fragile sign etc.

BOXES excl.VAT

<u>Reference</u>	<u>Size</u>	<u>Style</u>	<u>Class</u>	<u>Print</u>	<u>Quantity</u>	<u>Price each</u>
Stock 1	150x100x100	RSC	AC	PLAIN	500	R1.77
Stock 2	250x150x150	RSC	AC	PLAIN	500	R2.69
Stock 3	250x150x250	RSC	AC	PLAIN	500	R3.91
Stock 4	300x228x300	RSC	AC	PLAIN	500	R4.60
Stock 5	450x300x300	RSC	AC	PLAIN	500	R6.97
Stock 6	600x450x300	RSC	AC	PLAIN	300	R10.83
Stock 7	450x450x500	RSC	AC	PLAIN	300	R12.60

The following products are also available:



CLEAR/BUFF TAPE



MASKING TAPE



POLYTHENE SHRINK FILM

**CLEAR / BUFF TAPE
POLYPROPYLENE**

SIZE	SALE UNIT
12 x 50	144 / case
18 x 50	96 / case
24 x 50	72 / case
36 x 50	48 / case
48 x 50	36 / case
60 x 66	30 / case
48 x 100	26 / case
72 x 50/100	24 / case
96 x 50/100	18 / case
48 x 1000	6 / case

MASKING TAPE

SIZE	SALE UNIT
UTILITY 60 DEGREE	
AUTOMOTIVE 80 DEGREE	
12 x 40/50m	72 / case
18 x 40/50m	48 / case
24 x 40/50m	36 / case
36 x 40/50m	24 / case
48 x 40/50m	24 / case
72 x 40/50m	16 / case



POLYPROPYLENE STRAPPING



STEEL STRAPPING



STEEL STRAPPING
SALE UNIT: Kg
10/13/16/19/32mm x 0.5
19/32mm x 0.9




HAND
SALE UNIT: Coils
COLOUR: Black / White
SIZE: 12 x 1500 / 2000



MACHINE GRADE
SALE UNIT: Coils
COLOUR: White
SIZE: 9 x 3700 / 4000
12 x 2000

COMBINATION
TOOLS

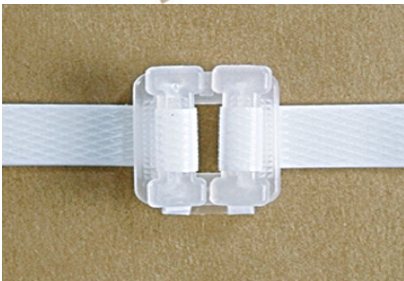

Various Labels


Blank Labels (Thermal / Non - Thermal)

Queries: Deliveries / Production 087 353 4446

Barcode Labels
Consecutively Numbered Labels
Label Design
Barcode Printers / Software / Accessories
Ribbons



Fragile Labels

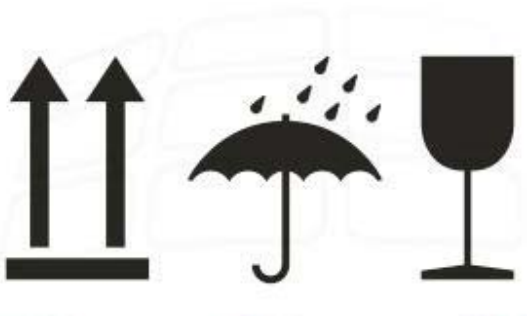



Fragile Handle With Care 45mm x 101mm
Fragile Handle With Care 80mm x 153mm
Glass / Handle With Care 48mm x 160mm
Packing Slip Enclosed 45mm x 160mm
This Side Up



CORRUGATED BOXES – STOCK

STOCK 1	SWB	150 X 100 X 100
STOCK 2	SWB	250 X 150 X 150
STOCK 3	SWB / DWB	250 X 150 X 250
STOCK 4	SWB / DWB	300 X 230 X 300
STOCK 5	SWB / DWB	450 X 300 X 300
STOCK 6	SWB / DWB	610 X 450 X 300
STOCK 7	SWB / DWB	450 X 450 X 500


SIZES CAN BE ALSO SPECIFCALLY MADE FOR CUSTOMERS REQUIREMENTS.

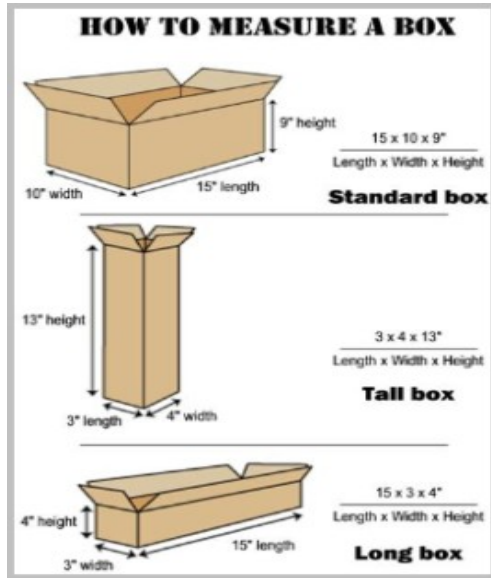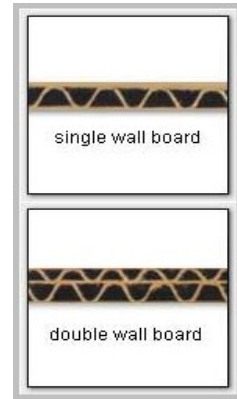

CORRUGATED ROLLS
36" / 915 MM 22KG P/ROLL
48" / 1.2M 30 KG P/ROLL

TOILET PAPERS

- 1 PLY - INDUSTRIAL 48s
- 2 PLY - INDUSTRIAL - 48s
- 2 PLY – DELUX
- 1.250 / 1.500 ROLLS - 1MM TO 5MM
- AIROTHENE SHEETS 25MM TO 50MM

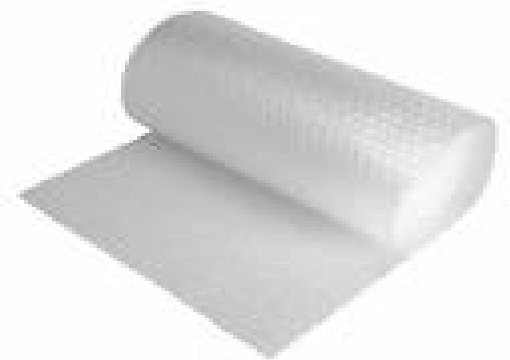

BUBBLE WRAP
1.250 X 100M
ANTI-STATIC BUBBLE WRAP
PALLET WRAP
300 / 400 / 450 WIDTHS

300 / 400 / 1000 METERS
13 / 15 / 20 / 25 / 30 MICRON
HAND AND MACHINE ROLLS

TAPES
CLEAR / BUFF TAPES
PRINTED 1, 2, 3 COLOUR
LAYOUTS
CARDBOARD EDGE GUARDS

- 50 X 50 X 1000
- 2 / 3 / 4 / 5MM



PLASTIC CORNER PROTECTORS

19MM AND 32 MM

POLYWOVEN BAGS



- MISPRINTS
- NEW
- PRINTED

We at DTP Believe that all types of strapping have its advantages. We supply a wide range of strapping for each company's needs and requirements.

We supply the following:
POLYWOVEN
 13MM, 16MM, 19MM ECONO

POLYPROPYLENE



- HAND BLACK / WHITE
- SEMI-AUTO / FULL-AUTO
- DFB BLUE , BRICK , PALLET

BUCKLES

- POLY BUCKLES
- NON-SLIP WIRE BUCKLES
- KNURLED WIRE BUCKLES

RATCHETS - TRUCK STRAPS

- 25MM & 50MM HANDLE
- TIEDOWN BELTS , WEBBING
- SHORTTAILS & HOOKS

PT 370	19MM	WOVEN, PP, PET, CORD
PT 450	32MM	
PT 500	50MM	

CONTAINER SPECIFICATIONS


- 6 M / 12 M
- CLOSED / OPEN / RACK



DESICANTS CONTAINER LINERS DUNNAGE BAGS

CONTAINER SEALS

- STRAP LOCK SEALS
- BOLT SEALS
- DOT LOCK
- PLASLOCK
- RING SEAL

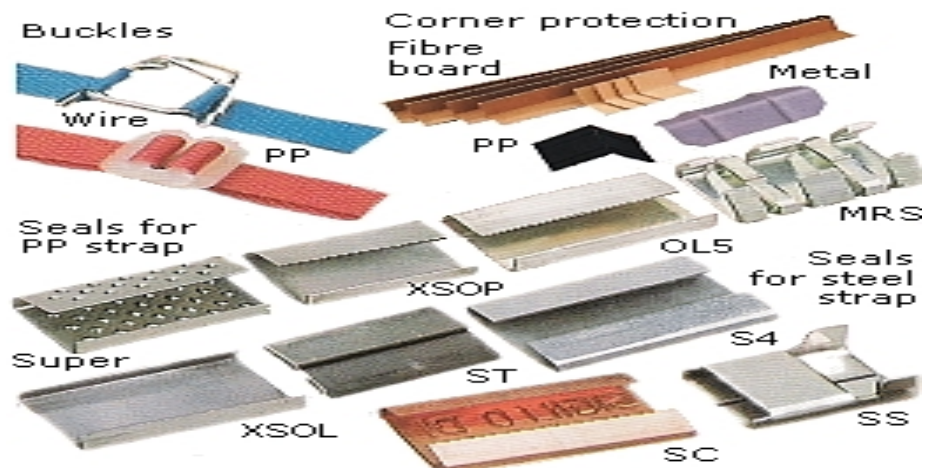

TENSIONERS

Our tensioners are used in various applications for all strapping products, from woven, pp, pet and cord strapping. We supply light, medium and heavy duty tensioners between 19mm and 50mm.



DISPENSERS

Our dispensers are heavy duty usage for all applications in woven, pp, pet and cord strapping. Dispensers can also be made to specification for client requirements.

PD 001	19/32	WOVEN, PP, PET, CORD
--------	-------	----------------------

Cargo Securing

POLYESTER COMPOSITE STRAPPING AND BUCKLES

Strong, Safe and Secure Strapping

DTP Strapping is a co-extruded polyester strapping made from high tenacity polyester textile fibres.

DTP STRAPPING draws on innovative technologies to combine high system strengths, shock absorbency, high retained tension into a single user friendly product. DTP STRAPPING is light, flexible and so it is easy to handle and dispose. Fastening is accomplished utilizing a simple, economical tool and a high joint efficiency buckle.

STRAPPING AND LASHING

REFERENCE	WIDTH	LENGTH P/COIL PER METER	COILS/BOX
PQ 50	16 MM	850	2
PQ 60	19 MM	600	2
PQ 85	25 MM	500	2
PQ 105	32 MM	300	2
NW 105 LASH	32 MM	100	1
NW 150 LASH	38 MM	100	1
NW 200 LASH	40 MM	100	1



*Certified by **CORDSTRAP** www.cordstrap.net, Accredited by Dept. of Agriculture and Forestry.*

PLEASE CONTACT DTP FOR PROFESSIONAL ADVICE ON STRAPPING REQUIREMENTS NEEDED FOR SAFE CARGO STRENGTHS ON LOADS

All our products are made out of A-Grade SA Pine and are quality guaranteed. We manufacture and supply pallets, crates, boxes, timber decks, loose timber, tonnage etc.

We are your one stop pallet and crate manufacturer, please feel free to contact us for any of your requirements.

We are BBEE Registered Level 3 No. ABACUS 1429



BUCKLES

REFERENCE	WIDTH	BUCKLES PER CARTON	P/CARTON
PB 16	16MM	1000	1
PB 19	19MM	500	1
PB 25	25MM	250	1
PB 32	32MM	125	1
PB 38	38MM	75	1
PH 50	50MM	30	1

REGISTRATION NO: ZA - D21
HT - DB



BVA 086

